

# SUL 184 FME

Item no.: 1840300

Time and light control  
Analogue time switches

## Description

- Analogue time switch
- 1 channel
- 3 days power reserve
- Daily program
- Shortest switching time: 15 minutes
- Clock hands for time display
- Switching preselection
- Switching status display



## Technical data

SUL 184 FME	
Frequency	60 Hz
Number of channels	1
Installation type	Front panel installation/wall installation
Type of connection	Screw terminals
Program	Daily program
Switching capacity at 250 V AC, $\cos \varphi = 1$	16 A
Switching capacity at 250 V AC, $\cos \varphi = 0,6$	8 A
Shortest switching times	15 min

SUL 184 FME	
Programmable every	15 min
Time accuracy at 25 °C	$\leq \pm 5$ s/day (quartz)
Type of contact	Changeover contact
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Type of protection	IP 20
Protection class	II according to EN 60 730-1
Ambient temperature	55°C

Subject to technical changes and misprints

additional information at: [www.theben.de/product/1840300](http://www.theben.de/product/1840300)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# SUL 184 FME


Item no.: 1840300



## Connection example



## Scale drawings

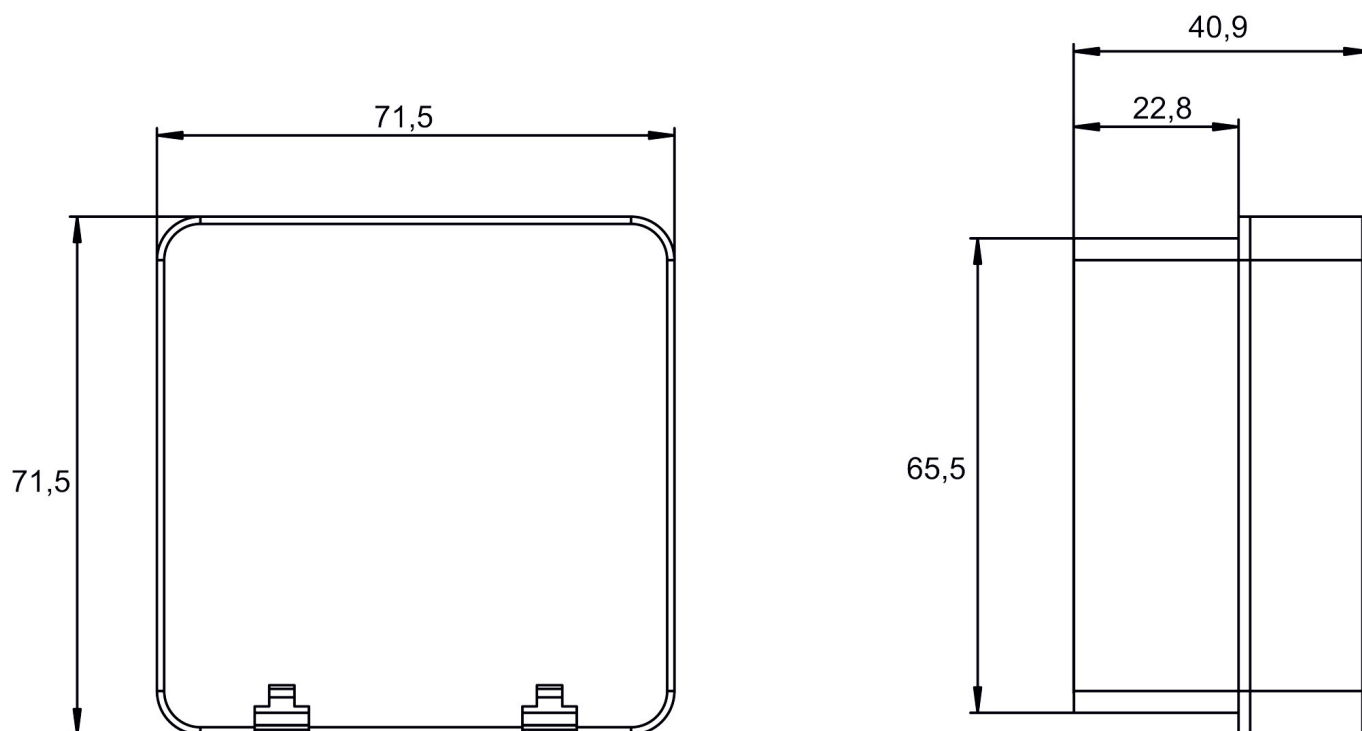

Subject to technical changes and misprints

additional information at: [www.theben.de/product/1840300](http://www.theben.de/product/1840300)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

23/11/2024

Page 2 of 2