

Absolute encoders – multiturn

**Standard, ATEX/IECEX – zone 1/21
SIL3/PLe, mechanical multiturn, optical**

Sendix 7063FS3 / 7083FS3 (shaft / hollow shaft)

SSI / BiSS + SinCos



SIL3
Functional Safety
PLe

Ex protection and Functional Safety in one device.

The absolute multiturn encoders 7063FS3 and 7083FS3 of the Sendix family are suited for use in safety-related applications up to SIL3 acc. to EN 61800-5-2 or PLe to EN ISO 13849-1.

In addition, these devices ensure Ex protection in a compact 70 mm housing out of seawater durable aluminum.



Functional Safety

- Encoder with individual certificate from TÜV.
- Suitable for applications up to SIL3 acc. to EN 61800-5-2.
- Suitable for applications up to PLe acc. to EN ISO 13849-1.
- SSI or BiSS interface with incremental SinCos tracks with 2048 ppr.
- Certified mechanical mounting + electronic.

Explosion protection

- “Flameproof-enclosure” version.
- ATEX with EC type examination certificate.
- IECEx with certificate of conformity (CoC).

Order code 8.7063FS3 . 1 X 4 X . X X 2 1 . XXXX
Shaft version Type

- a** Flange
1 = clamping / synchronous flange, IP67, Ø 70 mm [2.76"]
- b** Shaft (Ø x L)
2 = 10 x 20 mm [0.39 x 0.79"], with flat
1 = 12 x 25 mm [0.47 x 0.98"], with keyway for 4 x 4 mm [0.16 x 0.16"] key
- c** Interface / power supply
4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC
- d** Type of connection
1 = axial cable, 2 m [6.56'] PUR
2 = radial cable, 2 m [6.56'] PUR
A = axial cable, length > 2 m [6.56']
B = radial cable, length > 2 m [6.56']
preferred length see **i**, e. g.: 0100 = 10 m [32.81']

- e** Code
B = SSI, binary
C = BiSS, binary
G = SSI, gray
- f** Resolution ²⁾
A = 10 bit ST + 12 bit MT
1 = 11 bit ST + 12 bit MT
2 = 12 bit ST + 12 bit MT
3 = 13 bit ST + 12 bit MT
4 = 14 bit ST + 12 bit MT
7 = 17 bit ST + 12 bit MT
- g** Inputs / outputs ²⁾
2 = SET input
- h** Options
1 = no option

- i** Cable length in dm ¹⁾
0050 = 5 m [16.40']
0100 = 10 m [32.81']
0150 = 15 m [49.21']
0200 = 20 m [65.62']
- Optional on request*
- special cable length
- other singleturn resolutions
- seawater resistant (stainless steel V4A)

1) Not applicable with connection types 1 and 2.
2) Resolution, preset value and counting direction factory-programmable.

Absolute encoders – multiturn

| | | |
|---|--|--------------------------|
| Standard, ATEX/IECEX – zone 1/21 SIL3/PLe, mechanical multiturn, optical | Sendix 7063FS3 / 7083FS3 (shaft / hollow shaft) | SSI/BiSS + SinCos |
|---|--|--------------------------|

| | | |
|---|--|--|
| Order code Hollow shaft | 8.7083FS3 Type | . X X 2 X . X X 2 1 . X X X X a b c d e f g h i 1) |
| a Flange 1 = with spring element, short 5 = with stator coupling, IP67, ø 65 mm [2.56"] | e Code B = SSI, binary C = BiSS, binary G = SSI, gray | i Cable length in dm 1) 0050 = 5 m [16.40'] 0100 = 10 m [32.81'] 0150 = 15 m [49.21'] 0200 = 20 m [65.62'] <i>Optional on request</i> - special cable length - other singleturn resolutions - IP65 version for T6 - seawater resistant (stainless steel V4A) |
| b Blind hollow shaft (insertion depth max. 41.5 mm [1.63"]) 1 = ø 12 mm [0.47"] 2 = ø 14 mm [0.55"] | f Resolution 2) A = 10 bit ST + 12 bit MT 1 = 11 bit ST + 12 bit MT 2 = 12 bit ST + 12 bit MT 3 = 13 bit ST + 12 bit MT 4 = 14 bit ST + 12 bit MT 7 = 17 bit ST + 12 bit MT | |
| c Interface / power supply 2 = SSI, BiSS / 10 ... 30 V DC | g Inputs / outputs 2) 2 = SET, DIR input additional status output | |
| d Type of connection 1 = axial cable, 2 m [6.56'] PUR 2 = radial cable, 2 m [6.56'] PUR A = axial cable, length > 2 m [6.56'] B = radial cable, length > 2 m [6.56'] | h Options 1 = no option | |

| Accessories | | Order no. |
|--|---|-------------------------|
| EMC shield terminal | for top-hat rail mounting | 8.0000.4G06.0312 |
| Screw retention | Loctite 243, 5 ml | 8.0000.4G05.0000 |
| Bellows coupling, safety-oriented | You will find an overview of our couplings for Sendix shaft encoders in the accessories section or under kuebler.com/accessories . | |
| Safety modules Safety-M compact | You will find an overview of our systems and components for Functional Safety and the corresponding software in the safety technology section or under kuebler.com/safety . | |
| LED SSI display 570 / 575 | Electronic position display up to 32 bit. You will find an overview in the accessories section or under kuebler.com/position_display . | |

Further accessories can be found in the accessories section or in the accessories area of our website at: kuebler.com/accessories.
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: kuebler.com/connection_technology.

| Technical data | | Notes regarding "Functional Safety" | |
|--|---|--|---|
| Explosion protection | | These encoders are suitable for use in safety-related systems up to SIL3 acc. to EN 61800-5-2 and PLe to EN ISO 13849-1 in conjunction with controllers or evaluation units, which possess the necessary functionality. Additional functions can be found in the operating manual. | |
| ATEX | | Safety characteristics | |
| EC type-examination certificate | PTB09 ATEX 1106 X | | |
| Category (gas) | Ex II 2 G Ex d IIC T4 - T6 Gb | | |
| Category (dust) | Ex II 2D Ex tb IIIC T135°C - T85°C Db | Classification | PLe / SIL3 |
| Relevant standards | EN 60079-0:2012; EN 60079-1:2014; EN 60079-31:2009 | System structure | 2 channel (Cat. 4) |
| IECEX | | PFH_d value 3) | 1.09 x 10 ⁻⁸ h ⁻¹ |
| Certificate of Conformity (CoC) | IECEX PTB 13.0026 X | Mission time / Proof test interval | 20 years |
| Category (gas) | Ex d IIC T4 - T6 Gb | Relevant standards | EN ISO 13849-1:2015; EN ISO 13849-2:2012; EN 61800-5-2:2007 |
| Category (dust) | Ex tb IIIC T135°C - T85°C Db | | |
| Relevant standards | IEC 60079-0:2011; IEC 60079-1:2014; IEC 60079-31:2008 | | |

1) Not applicable with connection types 1 and 2.
2) Resolution, preset value and counting direction factory-programmable.

3) The specified value is based on a diagnostic coverage of 99 %, that must be achieved with an encoder evaluation unit.
The encoder evaluation unit must meet at least the requirements for SIL3.

Absolute encoders – multiturn

| | | |
|---|--|------------------------|
| Standard, ATEX/IECEX – zone 1/21 SIL3/PLe, mechanical multiturn, optical | Sendix 7063FS3 / 7083FS3 (shaft / hollow shaft) | SSI/BiSS+SinCos |
|---|--|------------------------|

| Electrical characteristics | |
|---|--|
| Power supply | 10 ... 30 V DC |
| Current consumption (no load) | max. 50 mA |
| Reverse polarity protection for power supply | yes |
| Short circuit proof outputs | yes ¹⁾ |
| CE compliant acc. to | EMC guideline 2014/30/EU ATEX guideline 2014/34/EU Machinery directive 2006/42/EC RoHS guideline 2011/65/EU |

| EMC | |
|---------------------------|---|
| Relevant standards | EN 55011 class B:2009 / A1:2010 EN 61326-1:2013 EN 61326-3-1:2008 |

| Mechanical characteristics | |
|--|--|
| Maximum speed | 6000 min ⁻¹ (continuous) |
| Starting torque – at 20°C [68°F] | < 0.05 Nm |
| Mass moment of inertia | 4.0 x 10 ⁻⁶ kgm ² |
| Load capacity of shaft | radial 80 N axial 40 N |
| Weight | approx. 1.3 kg [45.86 oz] |
| Protection acc. to EN 60529 | IP67 |
| Ambient temperature | -40°C ... +60°C [-40 ... +140°F] Please note the specifications for temperature class in EC type-examination certificate! |
| Material | shaft stainless steel flange / housing seawater durable Al, type AlSiMgMn (EN AW-6082) cable PUR |
| Shock resistance acc. to EN 60068-2-27 | 500 m/s ² , 11 ms |
| Vibration resistance acc. to EN 60068-2-6 | 200 m/s ² , 5 ... 2000 Hz |

| SSI interface | |
|---|--|
| Output driver | RS485 transceiver type |
| Permissible load / channel | max. +/- 20 mA |
| Signal level | HIGH typ 3.8 V LOW at I _{Load} = 20 mA typ 1.3 V |
| Resolution singleturn | 10 ... 14 bit and 17 bit |
| Number of revolutions (multiturn) | 4096 (12 bit) |
| Code | binary or gray |
| SSI clock rate | 50 kHz ... 2 MHz |
| Data refresh rate | ST resolution ≤ 14 bit ≤ 1 μs ST resolution ≥ 15 bit 4 μs |
| Monoflop time | ≤ 15 μs |
| Note: if clock starts cycling within monoflop time a second data transfer starts with the same data. If clock starts cycling after monoflop time, the data transfer starts with updated values. The update rate depends on clock speed, data length and monoflop time. | |

| BiSS interface | |
|--|---|
| Output driver | RS485 transceiver type |
| Permissible load / channel | max. +/- 20 mA |
| Signal level | HIGH typ 3.8 V LOW at I _{Load} = 20 mA typ 1.3 V |
| Resolution singleturn | 10 ... 14 bit and 17 bit |
| Number of revolutions (multiturn) | 4096 (12 bit) |
| Code | binary |
| Clock rate | up to 10 MHz |
| Max. update rate | < 10 μs, depends on the clock rate and the data length |
| Data refresh rate | ST resolution ≤ 14 bit ≤ 1 μs ST resolution 17 bit 2.4 μs |
| Note: | – bidirectional, factory programmable parameters are: resolution, code, direction, alarms and warnings – CRC data verification |

| SinCos interface | |
|----------------------------|---------------------------|
| Max. frequency -3dB | 400 kHz |
| Signal level | 1 V _{pp} (±10 %) |
| Short circuit proof | yes ¹⁾ |
| Pulse rate | 2048 ppr |

| SET input | |
|---|--|
| Input | HIGH active |
| Input type | comparator |
| Signal level (+V = Power supply) | HIGH min. 60 % of +V max. +V LOW max. 25 % of +V |
| Input current | < 0.5 mA |
| Min. pulse duration (SET) | 10 ms |
| Timeout after SET signal | 14 ms |

The encoder can be set to zero at any position by means of a HIGH signal on the SET input. Other preset values can be factory-programmed. The SET input has a signal delay time of approximately 1 ms. Once the SET function has been triggered, the encoder requires an internal processing time of approximately 15 ms before the new position data can be read. If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.

| Power-ON | |
|--|--|
| After Power-ON the device requires a time of approx. 150 ms before valid data can be read. | |
| Hot plugging of the encoder should be avoided. | |

1) Short circuit to 0 V or to output, one channel at a time, power supply correctly applied.

Absolute encoders – multiturn

| | | |
|---|--|--------------------------|
| Standard, ATEX/IECEX – zone 1/21 SIL3/PLe, mechanical multiturn, optical | Sendix 7063FS3 / 7083FS3 (shaft / hollow shaft) | SSI/BiSS + SinCos |
|---|--|--------------------------|

Terminal assignment

| Interface | Type of connection | Features | Cable (isolate unused cores individually before initial start-up) | | | | | | | | | | | | |
|-----------|--------------------|----------|---|-----|----|----|----|----|----|-----|---|-----------|---|-----------|---------|
| | | | Signal: | 0 V | +V | C+ | C- | D+ | D- | SET | A | \bar{A} | B | \bar{B} | \perp |
| 4 | 1, 2, A, B | SET | Core marking: | 6 | 1 | 2 | 3 | 4 | 5 | 11 | 7 | 8 | 9 | 10 | shield |

+V: Encoder power supply +V DC
 0 V: Encoder power supply ground GND (0 V)
 C+, C-: Clock signal
 D+, D-: Data signal

SET: SET input
 A, \bar{A} : Cosine signal
 B, \bar{B} : Sine signal
 \perp : Protective earth


Dimensions shaft version

Dimensions in mm [inch]

Clamping / synchronous flange, \varnothing 70 [2.76]

Shaft type 1 with axial cable outlet

- 1 9 x M4, 10 [0.39] deep
- 2 Keyway for DIN 6885-A-4x4x25 key

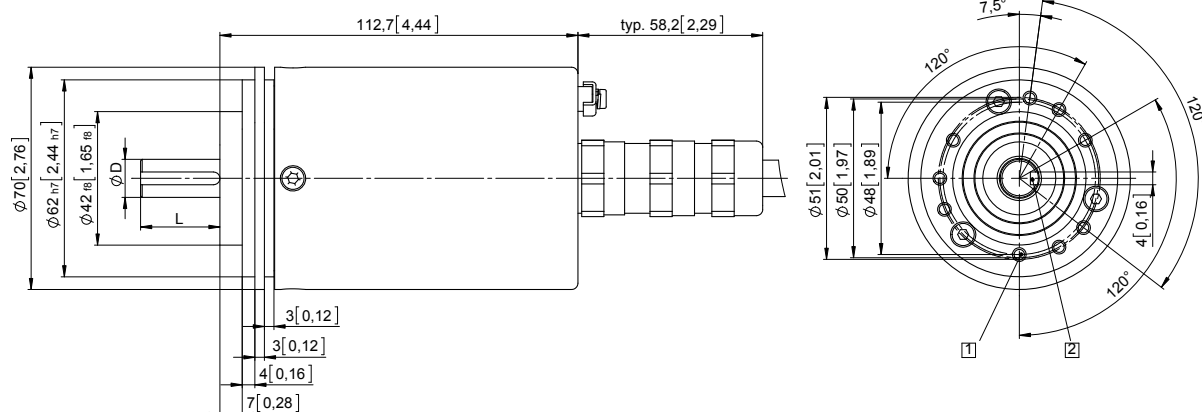


| D | Fit | L |
|-----------|-----|-----------|
| 12 [0.47] | g6 | 25 [0.98] |

Clamping / synchronous flange, \varnothing 70 [2.76]

Shaft type 2 with radial cable outlet

- 1 9 x M4, 10 [0.39] deep

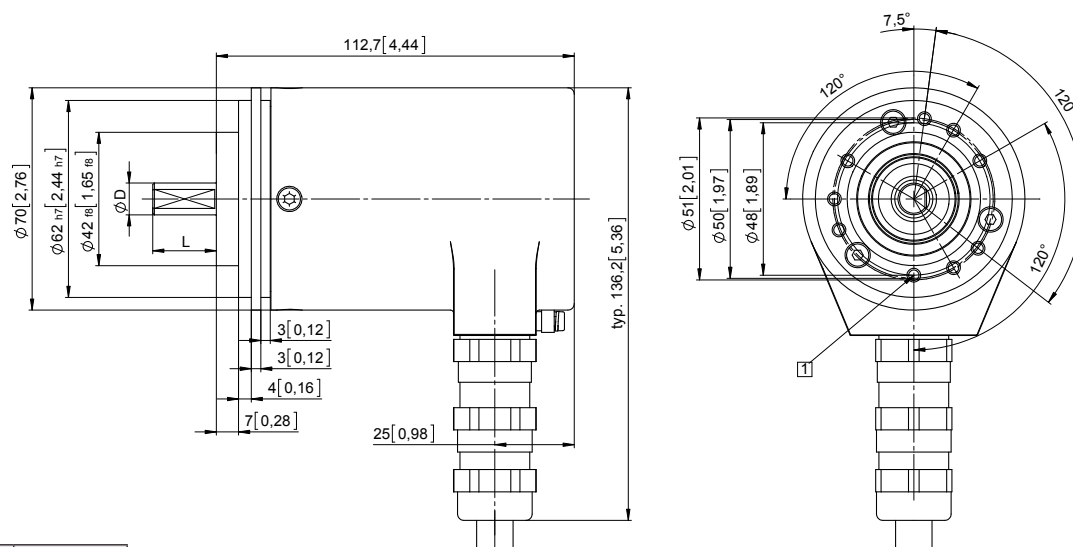

| D | Fit | L |
|-----------|-----|-----------|
| 10 [0.39] | f7 | 20 [0.79] |

Absolute encoders – multiturn

**Standard, ATEX/IECEX – zone 1/21
SIL3/PLe, mechanical multiturn, optical**

Sendix 7063FS3 / 7083FS3 (shaft / hollow shaft)



SSI/BiSS+SinCos

Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with spring element, short Flange type 1

- 1 9 x M4, 10 [0.39] deep
- 2 Slot spring element, recommendation: cylindrical pin DIN 7, $\varnothing 4$ [0.16]
- 3 Recommended torque for the clamping ring 2.5 Nm

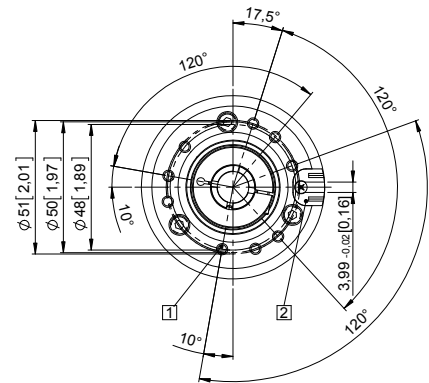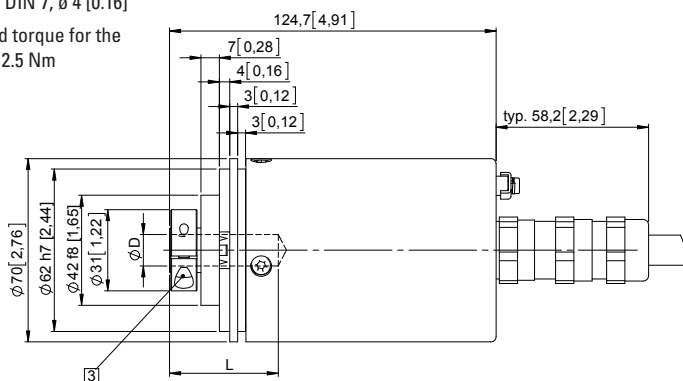



| D | Fit | L |
|-----------|-----|--------------|
| 12 [0.47] | H7 | 41.5 [1.63"] |
| 14 [0.55] | H7 | 41.5 [1.63"] |

L = insertion depth max. blind hollow shaft

Flange with stator coupling, $\varnothing 65$ [2.56]

Flange type 5

- 1 Recommended torque for the clamping ring 2.5 Nm

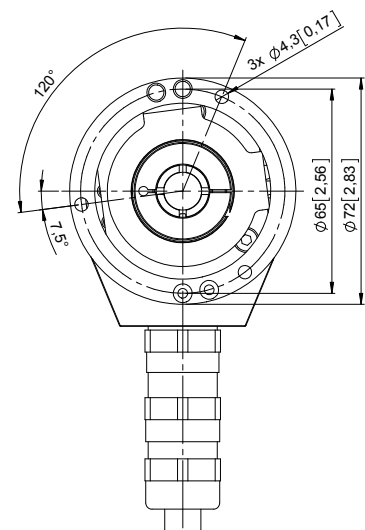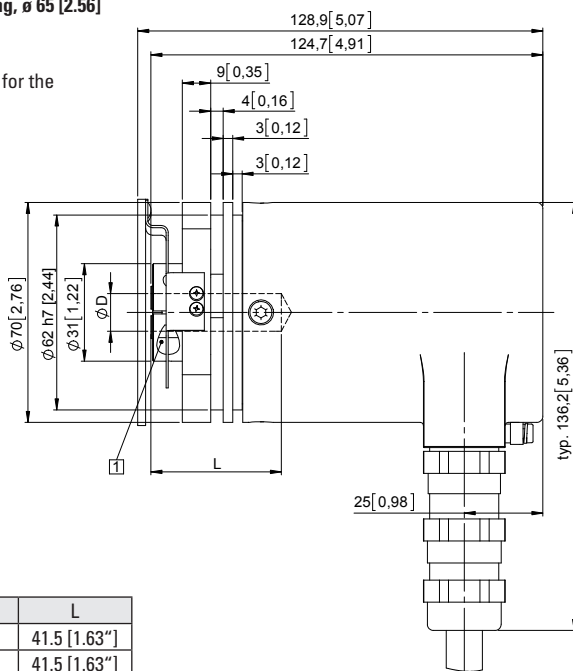

| D | Fit | L |
|-----------|-----|--------------|
| 12 [0.47] | H7 | 41.5 [1.63"] |
| 14 [0.55] | H7 | 41.5 [1.63"] |

L = insertion depth max. blind hollow shaft