## **AMUN 716 SR**

Item no.: 7160110



#### Climate control Sensor technology

#### Description

- For fan control
- Warning display for CO<sub>2</sub> concentration (lights)
- Power unit optionally available. Power unit is suitable for flush mounted installation
- Simple upgrade of uncontrolled ventilation systems possible
- 2 switch outputs CO2 controlled for 2 stage control, with manual and automatic mode as well as display of switching status
- $-3 \times 0 10 \text{ V}$  outputs for CO2, temperature and relative humidity
- CO<sub>2</sub> sensor
- Suitable for conference and meeting rooms, offices, schools/nurseries, passive and low-energy housing.



#### Technical data

	AMUN 716 SR
Operating voltage	24 V AC/DC SELV
Output	3 x 0-10 V, 2 x relay 5 A/250 V AC
Measuring range CO <sub>2</sub>	0 - 5000 ppm
Measuring range temperature	5°C 40°C
Measuring range humidity	30 - 80 % rF
ON/OFF thresholds	700 ppm ±200 ppm, 1300 ppm ±200
	ppm


	AMUN 716 SR
Type of connection	Screw terminals
Display	6 LEDs
Installation type	Wall installation (also on flush- mounted socket possible)
Type of protection	IP 20
Protection class	II according to EN 60 730-1


# **AMUN 716 SR**

Item no.: 7160110



### Scale drawings

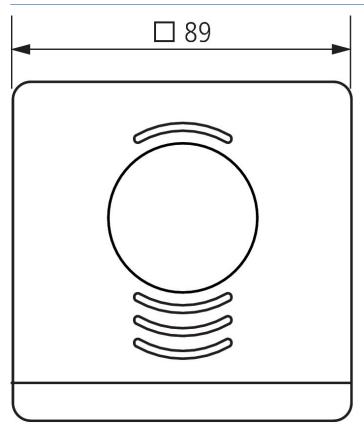

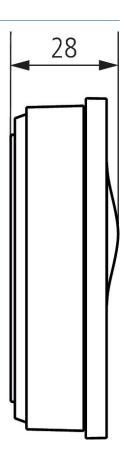

#### Accessories

Power unit CO2-sensor Item no.: 9070494

