


Connection cable

BIS C-850

Order code: BAE0094

BALLUFF

sensors worldwide

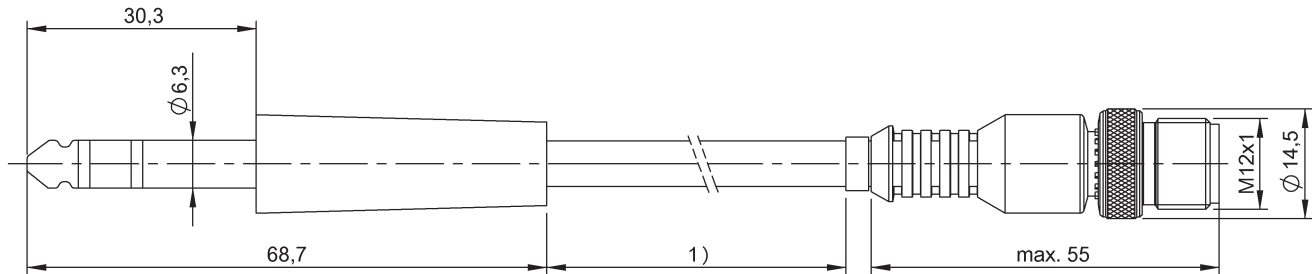

1) Cable length see notes

■ straight / straight



General attributes

Approvals / Conformity
Cable jacket color
Enclosure Type per IEC 60529

CE
black (flat)
IP67 mounted
IP20

Cable temperature max.
Cable temperature min.
Conductor cross-section
Connector configuration
Drag chain compatible
System

70 °C
-25 °C
0.34 mm²
straight / straight
No
molded / assembled

Electrical attributes

Mechanical attributes

Bending radius tensioned cable
Cable diameter D max.
Cable jacket material
Cable length L [m]

min. 3 x cable-Ø
4.8 mm
PU
0.50 m

Additional text

Adapter cable for handy programmer or read/write pistol

BIS C-810, BIS C-811, BIS C-820, BIS C-720,

connecting to all read-/write heads BIS C-3xx with 4 pole female.