

Inclinometers

**Inclinometer
MEMS / capacitive**

IS60, 1-dimensional

CANopen



With the IS60 inclinometer 1-dimensional inclinations in the measuring range 360° can be measured.

The sensor has a standardized CANopen interface, which enables easy configuration and start-up. All the parameters are stored in the internal permanent memory.



CANopen



High protection level



Shock / vibration resistant



Reverse polarity protection

Robust and reliable

- Protection rating IP68/IP69k.
- Robust plastic housing.
- High shock resistance.

User-friendly and accurate

- High resolution and accuracy.
- Programmable vibration suppression.
- High sampling rate and bandwidth.

Order code Inclinometer IS60

8.IS60 . **14523**
Type a b c d e

Attention:

This is not a standard product. Delivery on request.
Min. order quantity / frame order required.

a Measuring direction
1 = 1-dimensional

b Measuring range
4 = 360°

c Interface
5 = CANopen

d Power supply
2 = 10 ... 30 V DC

e Type of connection
3 = 2 x M12 connector

Connection technology

Order no.

Cordset, pre-assembled

M12 female connector with coupling nut for Bus in, 5-pin
5 m [16.40'] PUR cable

05.00.6021.2211.005M

M12 male connector with external thread for Bus out, 5-pin
5 m [16.40'] PUR cable

05.00.6021.2411.005M

Connector, self-assembly (straight)


M12 female connector with coupling nut for Bus in, 5-pin
M12 male connector with external thread for Bus out, 5-pin

05.B-8151-0/9
05.BS-8151-0/9

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories

Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology

Direction of inclination

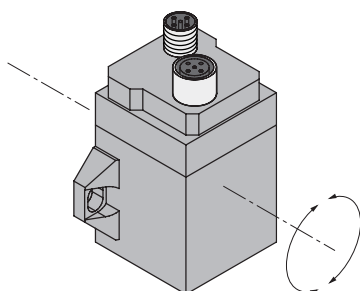

Inclinometers

Inclinometer MEMS / capacitive	IS60, 1-dimensional	CANopen
---	----------------------------	----------------

Technical data

Mechanical characteristics	
Connection CAN	M12 connector, 5-pin
Weight	approx. 0.2 kg [7.06 oz]
Protection acc. to EN 60529	IP68 / IP69k
Working temperature range	-40°C ... +80°C [-40°F ... +176°F]
Material	plastic PA12-GF30
Shock resistance	300 m/s ² , 11 ms
Vibration resistance	100 m/s ² , 10 ... 2000 Hz
Dimensions	68 x 42.5 x 42.5 mm [2.68 x 1.67 x 1.67"]

General electrical characteristics	
Power supply	10 ... 30 V DC
Power consumption	40 ... 105 mA
Reverse polarity protection	yes
Measuring axes	1
Measuring range	360°, no limit stop
Resolution	0.1°
Linearity deviation	max. ±0.4°
Calibration accuracy (at 25°C)	±0.1° (Zero point and final values)
Temperature drift (Zero point)	typ. ±0.008°/K
Sampling rate	100 Hz
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

Interface characteristics CANopen	
Interface	CANopen according to CiA DS-301, Profile to CiA DSP-410
Data rates	10 kbit/s, 20 kbit/s, 50 kbit/s, 125 kbit/s, 250 kbit/s, 500 kbit/s, 800 kbit/s, 1 Mbit/s
Functions	TPDO (RTR, cyclic, event-driven, synchronized), parametrization per SDO and object register, digital filter (Butterworth Low pass, 8th order), SYNC Consumer, EMCY Producer, output and control of internal device temperature (±2.0 K accuracy), failure control with the help of Heartbeat or Nodeguarding / Lifeguarding

A full description of the technical data can be found in the relevant product manual at www.kuebler.com.

Terminal assignment

PIN	Signal	Assignment
1	CAN_SHLD	Shield
2	CAN V+	Supply voltage (+24 V DC)
3	CAN_GND	0 V
4	CAN_H	CAN_H Bus cable
5	CAN_L	CAN_L-Bus cable



Dimensions

Dimensions in mm [inch]

