



BTL6-abcd-Mnnnn-f-lm

BTL6

Magnetostrictive linear position sensor Generation 6

a Interface

U = IO-Link

b Operating voltage

1 = 18 ... 30 V

c + d Interface characteristic 1 + 2

10 = 1 magnet

Mnnnn Nominal length (4-position)

M0500 = metric in mm
(M0050...M4572)

f Form factor

PF = Flat profile

l Connection type

S = Connector

m Connection type characteristic 1

4 = M12x1 connector with 4 pins

Basic features

Approval/Conformity	CE UKCA cULus WEEE
Magnets, number (factory setting)	1
Magnets, number max.	1

Display/Operation

Error value	0x7FFFFFFF
-------------	------------

Electrical connection

Polarity reversal protected	Ub up to 36 V
Short-circuit protection	to GND and to 36 V DC

Electrical data

Current consumption max. at 24 V DC	150 mA
Inrush current	≤ 3 A/0.5 ms
Operating voltage Ub	18...30 VDC
Output signal adjustable	no
Overvoltage protection	Ub up to 36 V
Switch-on delay max.	300 ms
Voltage-proof up to (GND to housing)	500 V DC

Environmental conditions

Ambient temperature	-25...70 °C
EN 55016-2-3, Radiation	For industrial and residential use
EN 60068-2-27, Continuous shock	50 g, 2 ms
EN 60068-2-27, Shock	50 g, 6 ms
EN 60068-2-6, Vibration	12 g, 10...2000 Hz
EN 61000-4-2, ESD	Severity Level 3
EN 61000-4-3, RFI	Severity Level 3
EN 61000-4-4, Burst	Severity Level 3
EN 61000-4-5, Surge	Severity Level 2
EN 61000-4-6, High-frequency fields	Severity Level 3
EN 61000-4-8 Magnetic fields	Severity Level 4
IP rating	IP67 with connector
Relative humidity	≤ 90 %, non-condensing
Storage temperature	-40...100 °C
Temperature coefficient typ.	≤ 30 ppm/K at 50% of nominal stroke 500mm

Functional safety

MTTF (40 °C)	116 a
--------------	-------

Interface

Data format	32-bit signed
Interface	IO-Link

Material

Cover material	Zinc, Die casting
Housing material	Aluminium, Anodized
Housing material, surface protection	Anodized

Mechanical data

Overall Length	nnnn + 146 mm
Speed detectable max.	10 m/s



Range/Distance

Linearity deviation	nnnn = 0050...0500: ± 200 µm nnnn > 0500: ± 0.04% FS
Measuring length	50...4572 mm
Repeat accuracy	≤ 30 µm
Sampling frequency max.	nnnn = 0050...1300: 1000 Hz nnnn = 1301...2700: 500 Hz nnnn = 2701...4572: 250 Hz

Magnetostrictive Sensors
 BTL6 -PF- Series - IO-Link



BTL6-U110-Mxxxx-PF-S4

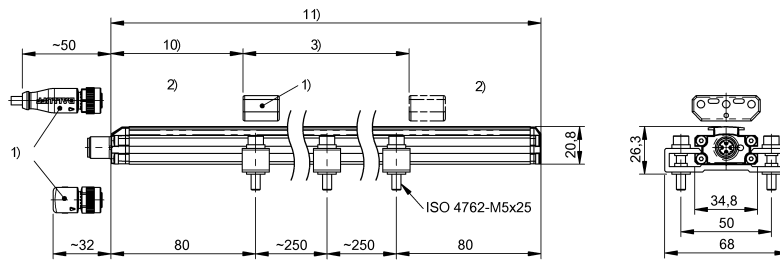

Pin	
1	L+ (18...30V)
2	n.c.
3	L- (GND)
4	C/Q (communication line)

- 1) not included in scope of delivery
- 2) Non-usable area
- 3) Nominal length = Measuring length
- 10) Null point
- 11) Installation length