

theRonda P360-100 M UP WH

Item no.: 2080020

theben

Präsenzmelder & Bewegungsmelder Deckenmontage innen

Description

- Passive infra-red presence detector for flush-mounted ceiling installation
- Circular detection area 360°, up to Ø 24 m (452 m²) at mounting height 3 m
- 1 channel light (Relay, 230 V)
- Automatic presence- and brightness-dependent control for lighting
- Mixed light measurement suitable for fluorescent lamps (FL/PL/ESL), halogen/incandescent lamps and LEDs
- Choice of fully or semi-automatic operation
- Adjustable brightness switching value, teach-in function
- Reduction of switch-off delay time in the event of short presence (brief-presence)
- Connection option for sensors or switches for manual switching with automatic recognition of sensor/switch
- Pulse function for staircase light time switch
- Switch-on delay and switch-off delay configurable
- Sensitivity adjustable
- Detection area can be limited using cover clip
- Ready for immediate use due to factory preset
- Test mode for checking function and detection area
- Extension of detection area via Master/Slave or Master/Master switching, a maximum of 10 detectors can be switched in parallel with each other
- Ceiling installation in flush-mounted socket
- Ceiling installation also possible with surface-mounted frame
- User remote control theSenda S, management remote control SendaPro (optional)



Subject to technical changes and misprints

additional information at: www.theben.de/product/2080020

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theRonda P360-100 M UP WH


Item no.: 2080020

theben

Technical data

| theRonda P360-100 M UP WH | | theRonda P360-100 M UP WH | |
|--------------------------------|--|-------------------------------|---|
| Operating voltage | 110 – 230 V AC | Compact and fluorescent lamps | 1150 VA (cos ϕ = 0,5) |
| Frequency | 50 – 60 Hz | Inrush current | max. 800 A / 200 μ s |
| Installation height | 2 – 10 m | LED lamp < 2 W | 60 W |
| Maximum height | 15 m | LED lamp 2-8 W | 600 W |
| Minimum height | > 1,7 m | LED lamp > 8 W | 600 W |
| Installation type | Ceiling installation | Type of connection | Screw terminals |
| Colour | White | Max. cable cross section | max. 2 x 2,5 mm ² |
| Switching output | Light | Size of concealed housing | \varnothing 55 mm (NIS, PMI) |
| Power consumption | ~0.15 W | Detection range | 452 m ² (\varnothing 24 m 360°) |
| Light measurement | Mixed light measurement | Detection angle | 360° |
| Setting range brightness | 30 – 3000 lx | Ambient temperature | -15°C ... 50°C |
| Light switch-off delay | 10 s - 60 min | Impact resistance | IK04 |
| Lamps | Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs | Type of protection | IP 54 (when fitted) |
| Incandescent/halogen lamp load | 2300 W | | |

Connection example

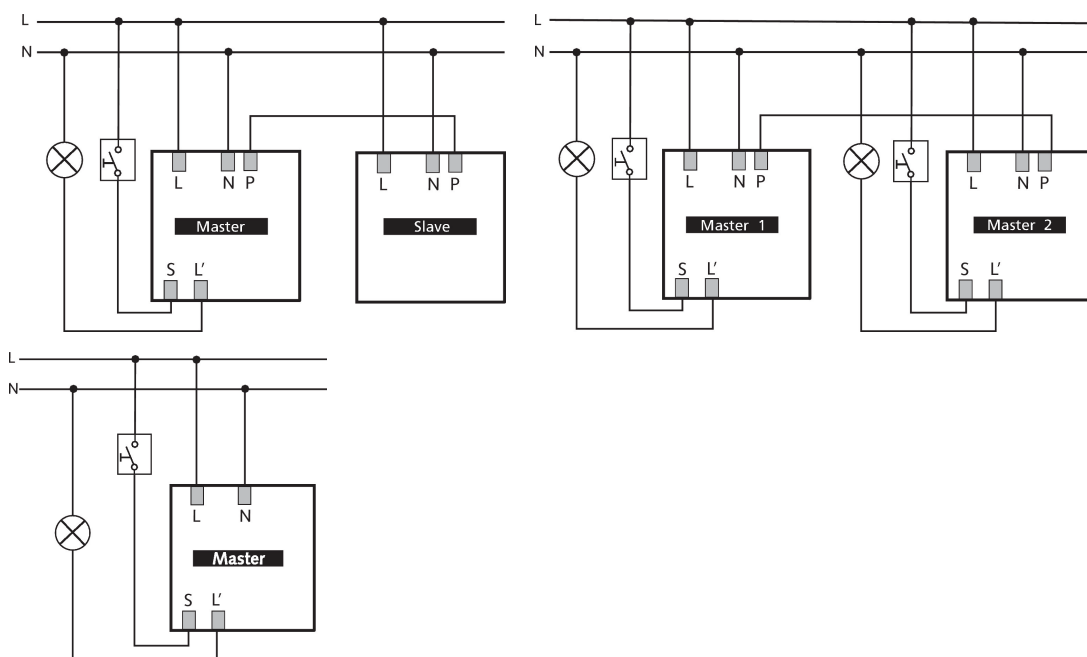

Subject to technical changes and misprints

additional information at: www.theben.de/product/2080020

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

08/03/2023

Page 2 of 5


theRonda P360-100 M UP WH

Item no.: 2080020



Detection range for planning applications at a temperature of 21 °C

| Mounting height (A) | Sitting (S) | Diagonally (T) |
|---------------------|---------------------------|---------------------------|
| 2 m | 16 m ² 4.5 m | 380 m ² 22 m |
| 2.5 m | 24 m ² 5.5 m | 415 m ² 23 m |
| 3 m | 28 m ² 6 m | 452 m ² 24 m |
| 3.5 m | 38 m ² 7 m | 452 m ² 24 m |
| 6 m | | 452 m ² 24 m |
| 10 m | | 491 m ² 25 m |

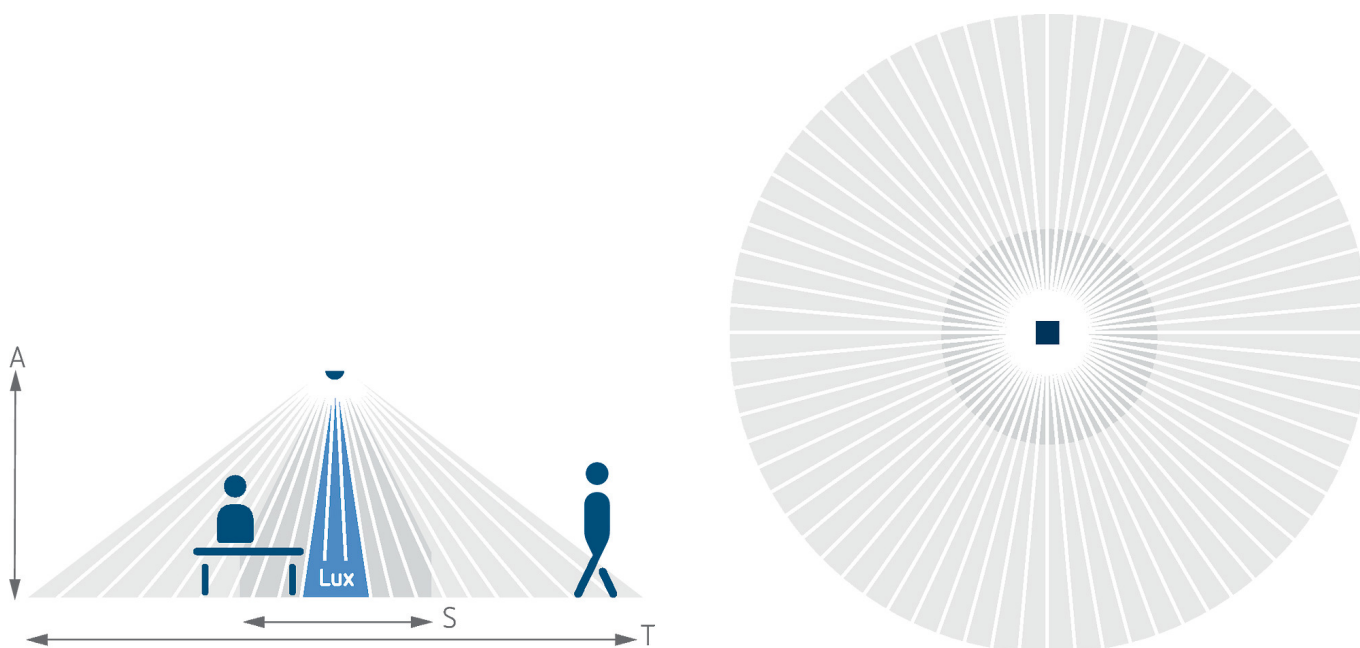

Detection range according to Sensnorm IEC 63180

| Mounting height (A) | Diagonally (T) | Head on to (R) | Sitting (S) |
|---------------------|-----------------------------|-----------------------------|-------------------------|
| 2.5 m | 434 m ² 23.5 m | 55 m ² 8.4 m | 50 m ² 8 m |
| 10 m | 707 m ² 30 m | 79 m ² 10 m | |
| 15 m | 616 m ² 28 m | 141 m ² 13.4 m | |

Subject to technical changes and misprints

additional information at: www.theben.de/product/2080020


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theRonda P360-100 M UP WH

Item no.: 2080020

theben

Scale drawings

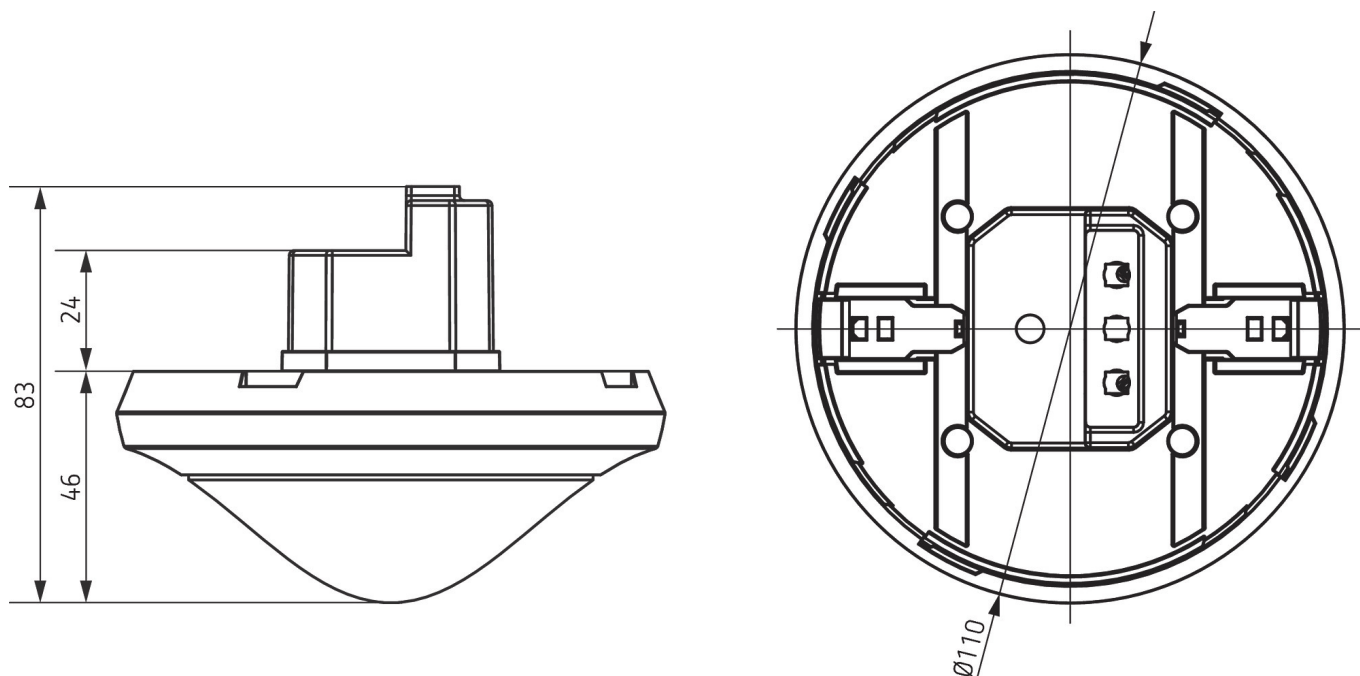

Accessories

theSenda P
Item no.: 9070910



theSenda S
Item no.: 9070911



Surface frame 110A GR
Item no.: 9070913



Ceiling installation box 73A
Item no.: 9070917


Surface frame 110A WH
Item no.: 9070912



Masking clip
Item no.: 9070921



QuickSafe
Item no.: 9070531



theSenda B
Item no.: 9070985



Subject to technical changes and misprints

additional information at: www.theben.de/product/2080020

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theRonda P360-100 M UP WH

Item no.: 2080020



Accessories

Cover 110 GR
Item no.: 9070591



Ceiling installation box 68A
Item no.: 9070992



Surface frame 110A BK
Item no.: 9070600



Cover 110 BK
Item no.: 9070851



Subject to technical changes and misprints

additional information at: www.theben.de/product/2080020

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.